

TUMBLING TRACK « NOVATRACK'ONE »



- ❑ F.I.G Approved
- ❑ This track provides a dynamic rebound that will allow the development of complex technical skills
- ❑ Special high-strength carpet
- ❑ Dynamic area marked with hook and loop fastener
- ❑ Tumble track with a run up of 10.5 m and a 30 cm thick landing area for a safe tumbler's landing
- ❑ Easy storage with an optional trolley
- ❑ Silent, stable, bouncy and comfortable



Composition

1. REF. 6297 - Run-up track only
2. REF. 6298 - Tumbling track only
3. REF. 6299 - Landing area only
4. REF. 6295 - Additional mat only (optional)



Technical feature

❑ Ref. 6297 - RUN-UP TRACK

- Composed of 7 wooden plates with metal legs of 1.50 x 1.00 m on which is placed a monobloc foam track of 10,5 x 1.00 m and 2.5 cm thick
- Junction of the plates connected by hook and loop fastener
- Side skirt on the perimeter
- Link with track through dedicated flap
- Dimensions: 1050 x 100 x 2,5 cm (Lxwxth.)

Ref. 6297



❑ Ref. 6298 - TUMBLE TRACK NOVATRACK'ONE

- Track made up of 17 elements measuring 150 x 200 x 22 cm
- Each element contains 2 uprights and 15 fiberglass brushes
- Secured by self-gripping bands and metal pins.
- Dimensions: 2550 x 200 x 22 cm (Lxwxth.)

Self-gripping bands and
metal pins


Ref. 6299

❑ Ref. 6299 - LANDING AREA

- Composed of 3 bi-density mats for a more stable, safe and comfortable landing
- Thickness: 30 cm
- Total length: 6 m
- Junction of the mats connected by hook and loop fastener and landing area marked with hook and loop fastener
- Link with track through dedicated strap and flap
- 1,000 denier PVC cover with M2 fire rating, phthalate-free

❑ Ref. 6295- ADDITIONAL MAT (OPTIONAL)

- Increase comfort while training.
- 1,000 denier PVC cover with M2 fire rating, phthalate-free
- Junction to the landing area connected by hook and loop fastener. Anti-slip underside.
- Dimensions: 400 x 200 x 10 cm (Lxwxth.)

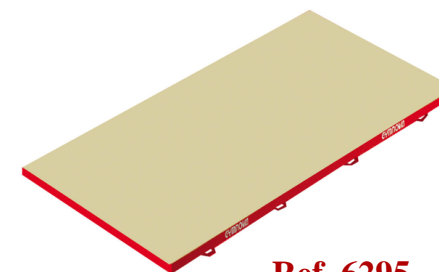

Ref. 6295

Not included with ref. 6296 et 6299 ; Please, consult us